

MAINTENANCE

▲ When performing maintenance of the equipment or if the evaporator unit's cover or the upholstery cover are removed, the system **MUST NOT BE SWITCHED ON** and you must not switch it on with any of these elements removed.

System must be turned off when exhaust fumes, pesticides or toxic particles could enter the cab through the system.

Keep the tank clean. Every 200 hours of use

- Drain all the water from the tank by removing the drain plug.
- Rinse with clean water thoroughly
- Pour one bottle of Viesia Scented Cleansing Fluid.
- Fill-up the tank with clean water.

Each 6 months change the package of granulated Calfa Bas crystals.
Do not use chemical products to clean the control panel.

Every 2 months or according to working conditions:


- Submerge the evaporator in water with bleach (1).
 - Clean the grids of the air entrances (2).
 - Clean the filter of the collector tray (3).
 - Clean the air filter with air gun (4).
- Do not moisten the air filter.

Once a year replace the evaporator (1).

VIESA SCENTED FLUID (EVERY 200 HOURS OF USE)



GRANULATED CALFA BAS EACH 6 MONTHS

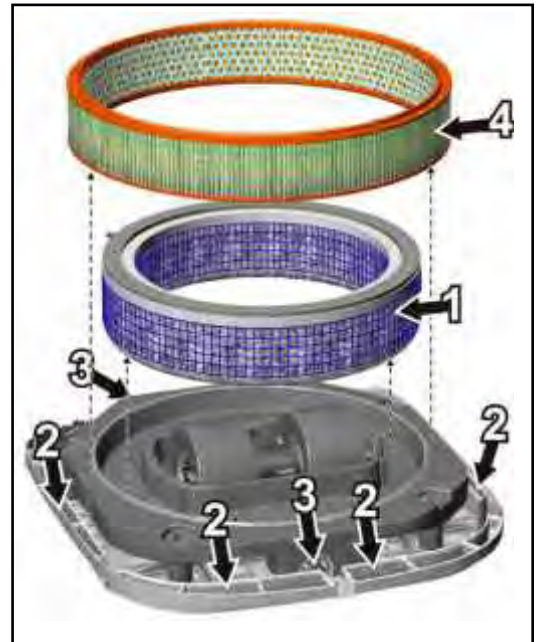

Reconnect water returning hose to the filter of the collector tray according to the figure.



The equipment will delay in cooling until the evaporator is totally wet.
Do not use fuses higher than 15 Amp.

The equipment will deactivate automatically due to low tension so as to prevent damages to the battery.

Use only clean water.

Foresee replenishment of water taking into account that the equipment consumes between 2 and 5 litres per hour depending on the ambient temperature.

During short stops leave the equipment on so as to keep the cabin fresh.

ORDER ON-LINE

www.viesa.ca / 1-888 438-8444